# Vibe Kit 06

### VBK-6

Vibe™ is a collection of cleverly-designed state-of-the-art 10′ exhibit booths. Vibe combines light-weight aluminum structures with pillowcase dye-sublimated printed fabric graphics for a truly unique appearance and experience. Vibe is efficient, easy to assemble and disassemble and offers remarkable style options and choices.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

### features and benefits:

- State-of-the-art snap button 30mm aluminum lightweight tube structure
- High-quality dye-sublimated zipper pillowcase graphics
- Easy step-by-step instructions
- Kit includes two frames, two rigid graphic accents, two fabric pillowcase graphics, three wheeled molded cases, one monitor stand and two 120 watt floodlights
- Lifetime warranty on hardware against manufacturer defects

### dimensions:

Hardware	Graphic	
Assembled unit: 117.5"w x 96"h x 27"d 2984.5mm(w) x 2438.4mm(h) x 685.8mm(d)	Total visual area: Foreground: 111.8"w x 92"h 2839.72mm(w) x 2336.8mm(h)	
	Background: 114"w x 91.5"h	
Shipping	2895.6mm(w) x 2324mm(h)	
Shipping dimensions - ships in 3 cases 2 OCL cases (each): 19"l x 19"w x 56"h 482.6mm(l) x 482.6mm(w) x 1422.4mm(h)	Wings: 8.729"w x 47"h 221.72mm(w) x 1193.8mm(h)	
1 OCH2 case: 52"l x 30"w x 15"h 1320.8mm(l) x 762mm(w) x 381mm(h)	Please be sure to include a 2" bleed around the perimeter.	
Approximate shipping weight (entire kit): 140 lbs / 63.5 kgs	Refer to related graphic templates for more information	

### additional information:

Graphic materials:

Dye-sublimated fabric & UV prints on 6mm sintra

Monitor mount holds max weight 50 lbs / 22.7 kgs

Monitor mount holds max size: 40" / 1016mm

Wings can be upgraded to frosted plex

Lights included: Lumina 200 120 watt floodlight, curved arm, black finish, 19.5" from end to end


Base color options:










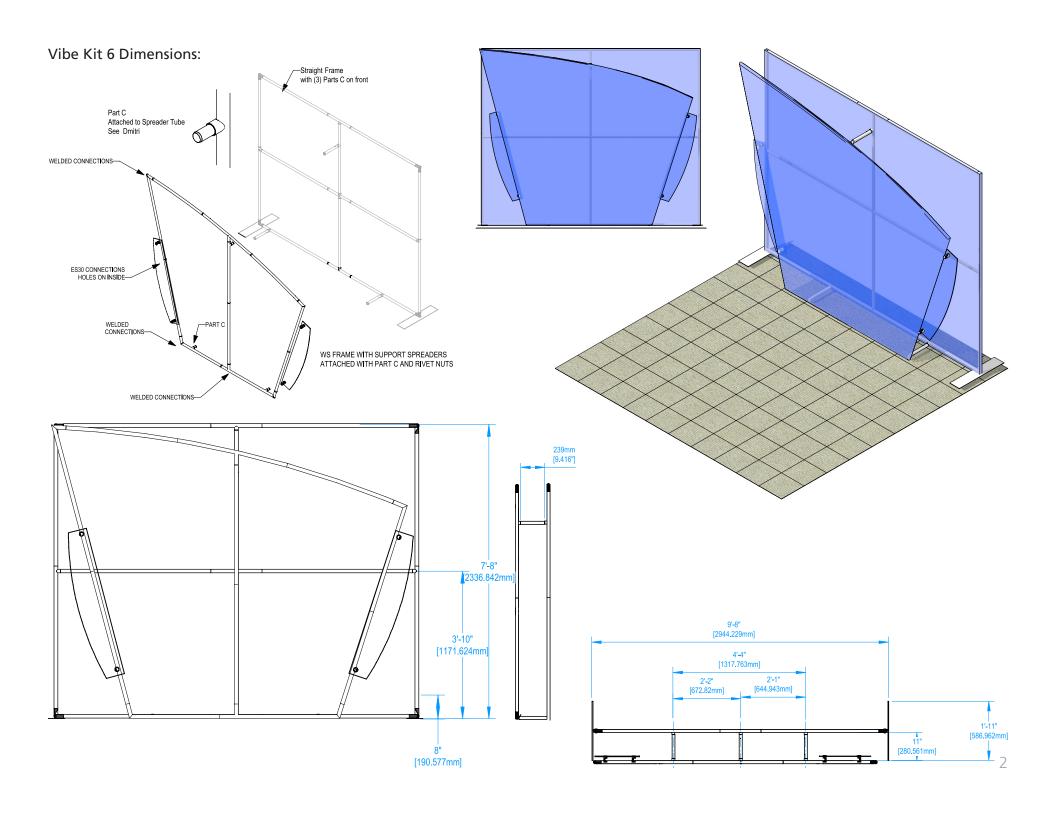



- Step 1: Assemble background frame
   Lay pieces out flat and assemble in numerical order as shown. Numbers will be on the back side of the tube.
- Assemble frame corners using TC-30-90 by pushing snap buttons. Connect middle of frame with WS-10-T5.
   Once frame is connected, attach feet (LN114-S2) by screwing bolt with Allen key.

# Parts Included – Straight Frame:


Code	Qty	Description
LN114-S2	x2	5MM STEEL BASE STYLE 2 FOR LINEAR
TC-30-90	x2	90 DEGREE ELBOW JOINT FOR 30MM TUBING
WS10-T1	х4	1114MM X 30MM TUBE
WS10-T2	х6	1270MM X 30MM TUBE
WS10-T4	x1	(2) 128MM TUBES SWAGED WITH PART TC-30-T
WS10-T5	x1	(2) 128MM TUBES SWAGED WITH PART TO-30-X
WS10-T6	x2	1114MM X 30MM TUBE WITH TC-30-T AND TC-30-90B
WS10-T7	x2	(2) 128MM TUBES SWAGED WITH PART TC-30-T

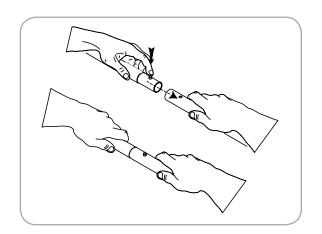

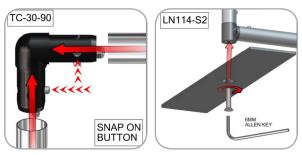

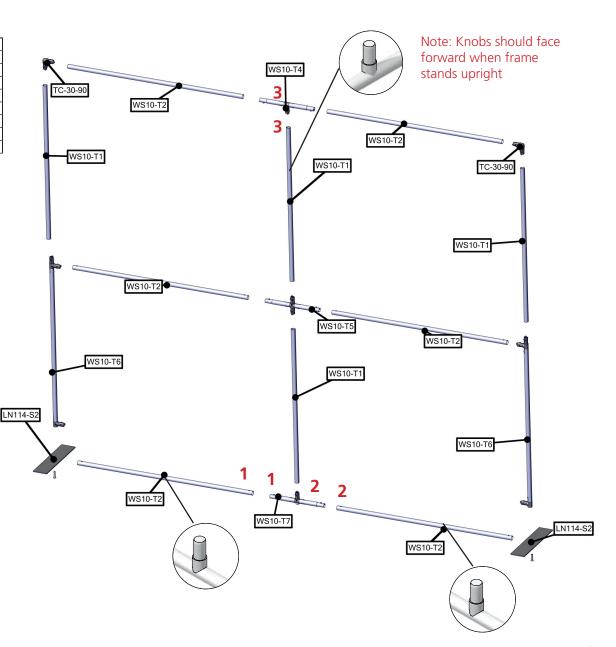



Step 2: Attach Graphic
- Slide graphic over top of frame and zip closed along bottom.

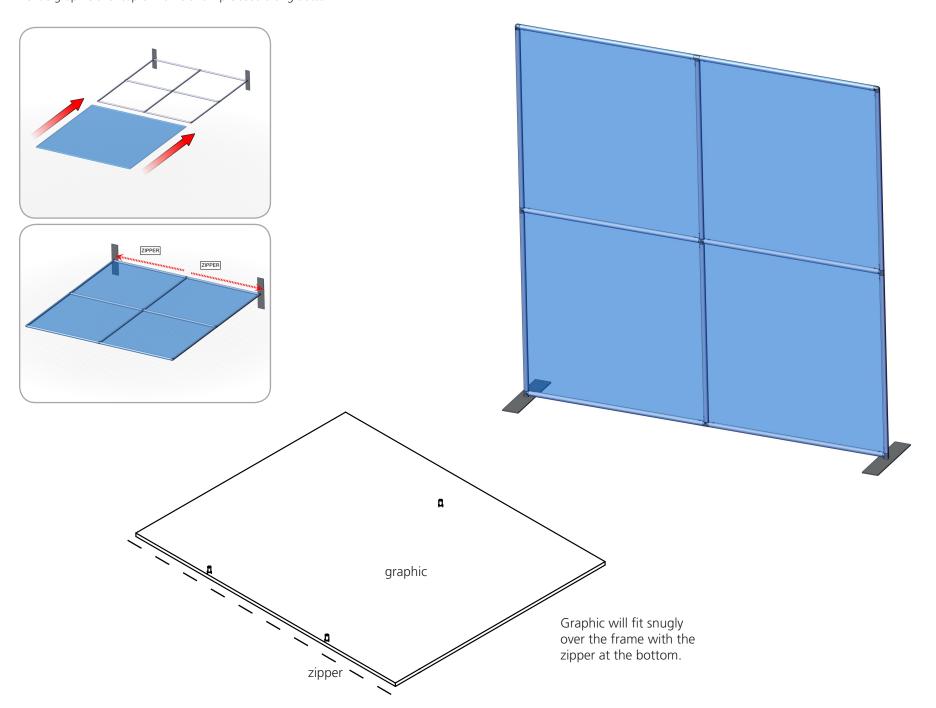

### Step 3: Assemble foreground frame


- Lay pieces out flat and assemble in numerical order as shown. Numbers will be on the back side of the tube.
- When frame is complete, stretch foreground graphic over the frame starting at the bottom. Pull tightly all the way up assuring holes in graphic align with knobs on frame and secure with zipper.
- Attach B12, B13 & B14 on foreground from to background frame at Part C using push-button connectors.

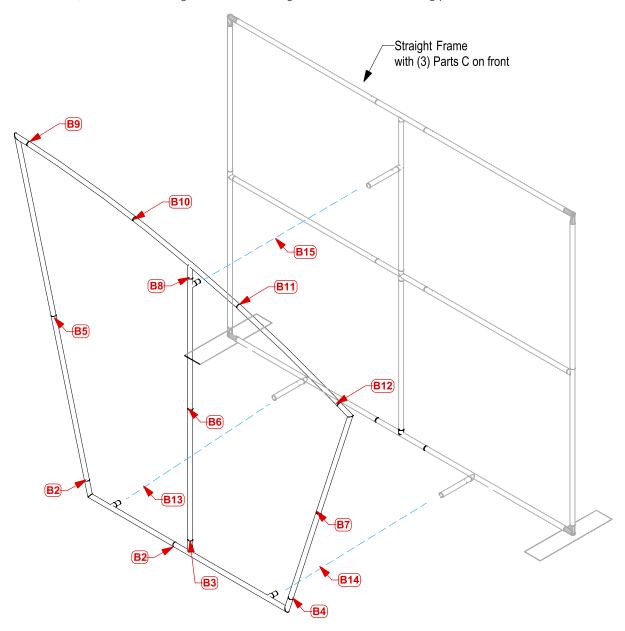


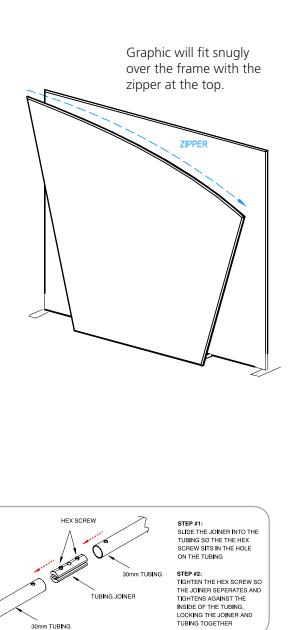

Step 4: Connect Accent Wings & Lights


- Attach lights to back frame.
- Attach header to foreground frame where designated in diagram. Use tube clamp and header attachment detail below.

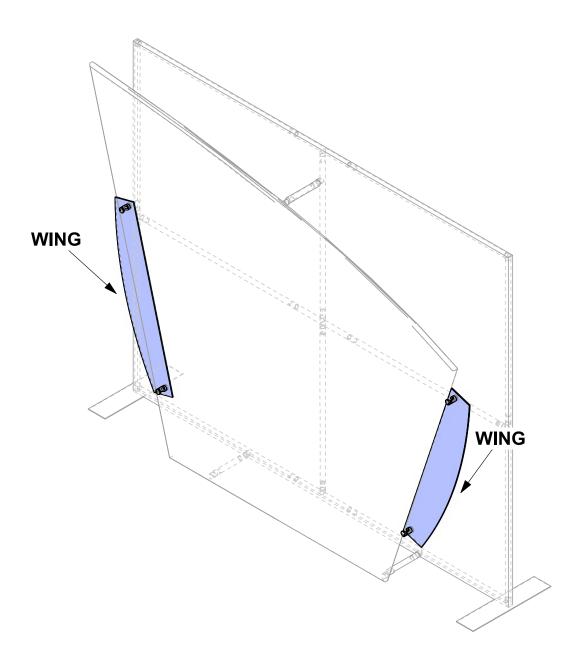


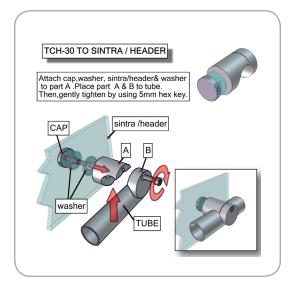




Parts included		
Part Label	Qty	
Upper frame	x1	
Lower frame	x1	
Joiner	x4	
Base plates	x2	
Base	x1	
Monitor bracket	x1	

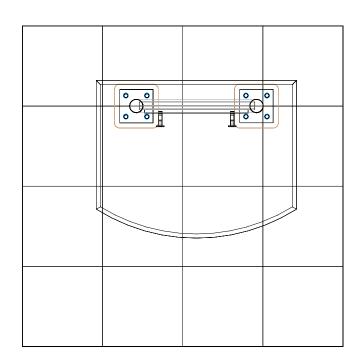


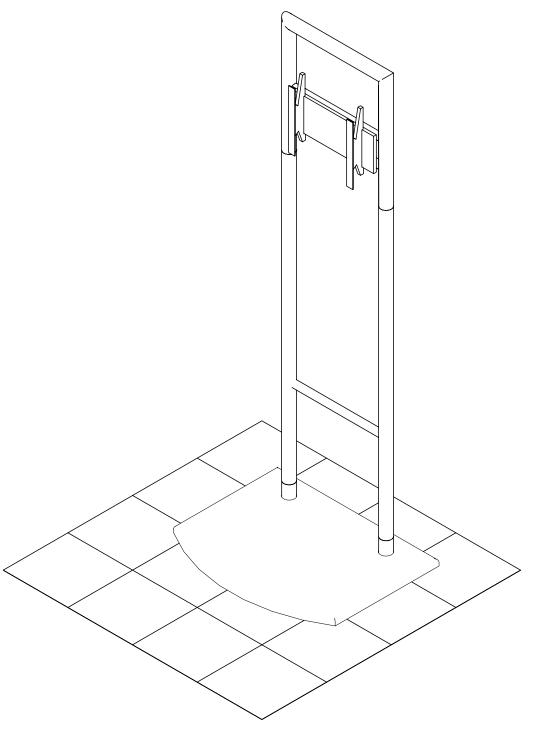

# Step 1


- Connect the plates to the base using four screws per plate as shown in the attachement detail below. Assure holes on tubing are facing inward.

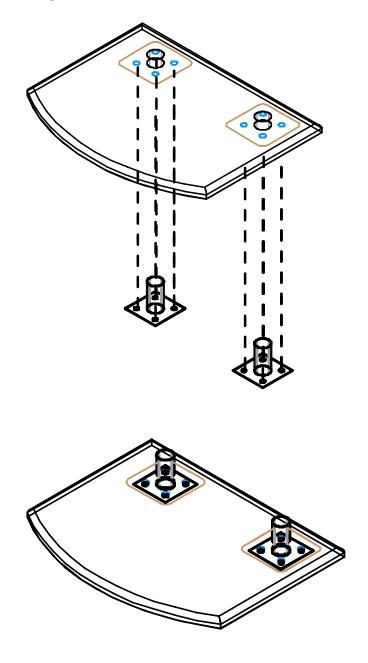


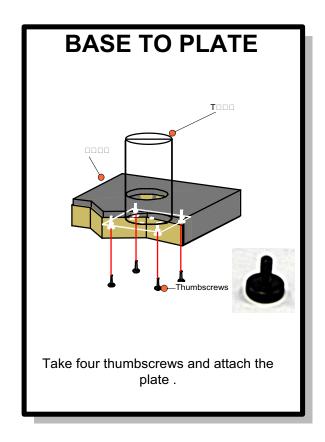


## Step 2

- Attach the lower frame to the base plates at points 1A and 2A following the labels. Use the joiner to connect as shown in the attachment detail below.
- Attach the upper frame to the lower frame at points 3A and 4A following the labels. Use the joiner to connect as shown in the attachment detail below.

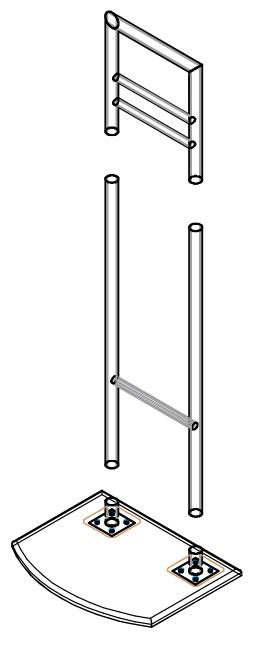


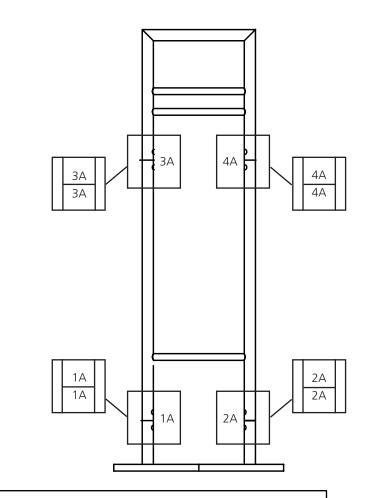


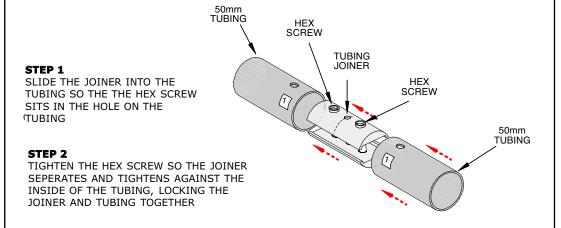

# Step 3

- To attach the monitor mount, put square head bolts through the back of the pre-drilled tube.
  Slide monitor mount onto bolts and secure with wingnuts. Position mount where desired.

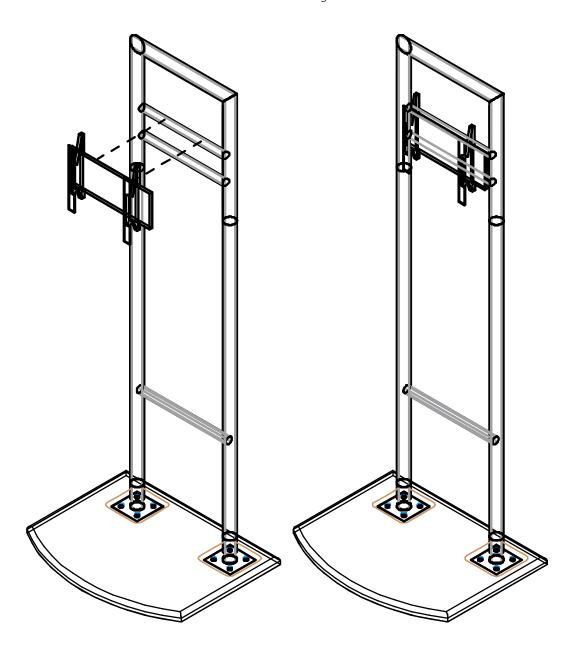

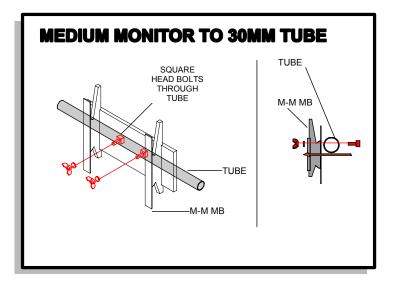

# **Check out these related products:**











